

LIQUID FEED APPLICATOR FOR BALE PROCESSOR



- Universal mount
- 75-gallon tank
- 1-1/2" hydraulically driven gear pump
- Pump can be used for application and self-fill
- Hydraulic flow control valve for rate adjustment
- 4-nozzle manifold
- 1-1/2" valve system for application and self-fill

\$2,490.00



2680 Commerce Rd
Rapid City SD 57702
800-658-5457 * 605-342-7644
605-342-4036 Fax
www.warnechemical.com


LIQUID FEED APPLICATOR FOR BALE PROCESSORS

INSTRUCTIONS



1. Universal mounting system, supplied with four u-bolts to mount applicator to 4'x6' box frame

2. Roper gear pump with reversible hydraulic drive for self-filling feature.

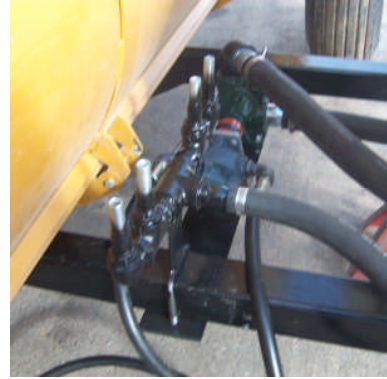

Application system also includes 4-nozzle manifold.

3. Hydraulic flow control needle valve for application rate adjustment. This valve is full flow in the reverse direction for faster self-filling.



4. Dual 1-1/2" bolted ball valves for application and self-fill.



5. Evenly space the four inlet nozzles across the back of the flail chamber. Drill 1/2" holes and weld on the 1/2" - 45° pipe fittings. Install 1/2" hose with clamps from manifold to the hose barb nozzles on the back of the flail chamber.



6. 75 gallon tank with sump. Tank and pump mounting brackets adjustable to fit a variety of bale processor models.



